



The Uniclic Joint

The patented Uniclic[®] joint system is a special tongue-and-groove joint patented by Unilin Décor of Belgium and licensed to Uniclic[®] flooring providers.

The key to the Uniclic[®] joint is the constant pressure that the lower lip exerts on the tongue, keeping tiles or planks tightly in place. This enables Uniclic[®] floors to “float” over existing floors or subfloors without glue or nails to hold it in place. It takes more than 450 kg (1,000 lbs.) of pressure per linear metre to pull apart two Uniclic[®] planks or tiles.

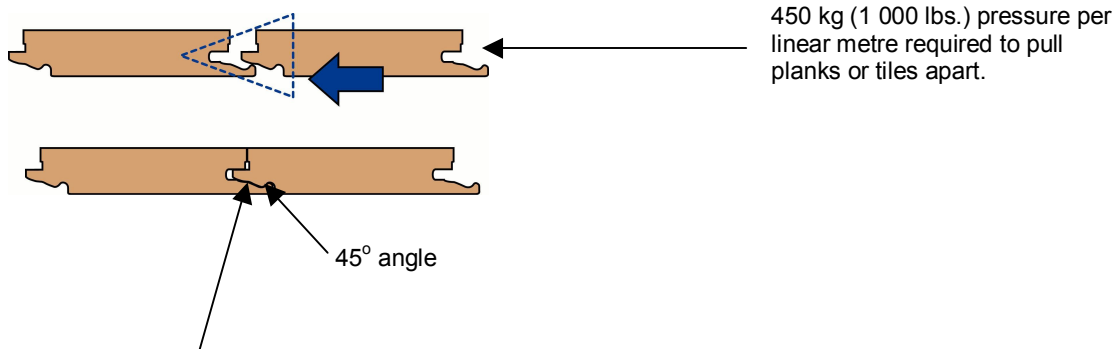

Lower lip exerts constant pressure on tongue, keeping planks tightly in place. Uniclic[®] floor “floats” over existing floor or subfloor.

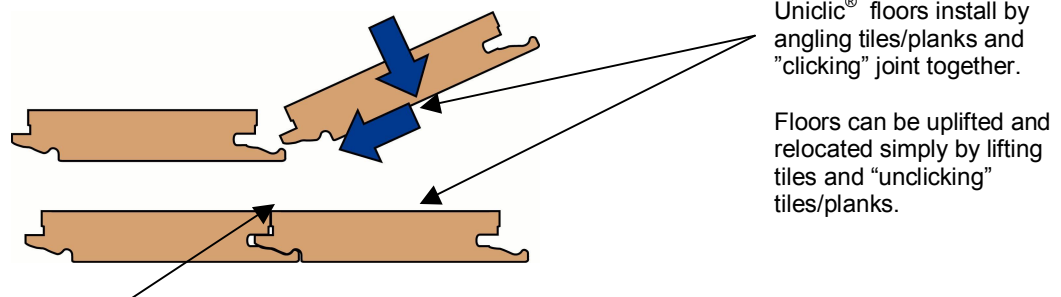

Ultra-tight Uniclic[®] means no gapping, and no “lipping”. Lipping can occur with some joint systems when one tile/plank is slightly above the other when tiles are joined together. Open joints can result over time with joint systems where fitting of the two pieces is not sufficiently tight and/or when pieces are not held against each other with continuous pressure.